

Actuator

LD10



Features

- ◆ LD10 is in-line design, compact and powerful. This linear and compact design makes LD10 is well suited for use in industrial application where installation space is limited.
- ◆ Main applications : industrial automation
- ◆ Input voltage : 24V DC / 12V DC
- ◆ Max. load : 1000N (push/pull) @ 24V DC
- ◆ Max. current : 3.8A @ 24V DC
- ◆ Max. speed : 18 mm/sec @ no load
- ◆ Stroke : 50~300 mm (other stroke available)
- ◆ Duty cycle : 10% or 2 min continuous operation in 18 min.
- ◆ IP protection level : IPX4
- ◆ Color : Black
- ◆ Noise Level : ≤ 65 dB
- ◆ Preset limit switches

Options

- ◆ Straight Cable / Spiral Cable
- ◆ Connector: F type Din plug (4pin) / Round and Flat plug (2pin)

Compatibility





1. Handset

HD, HT, H2N, RF TX


2. Control box

T-control box, CB3T

Performance Data

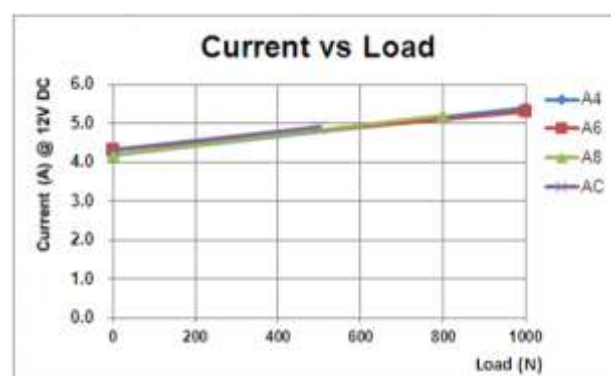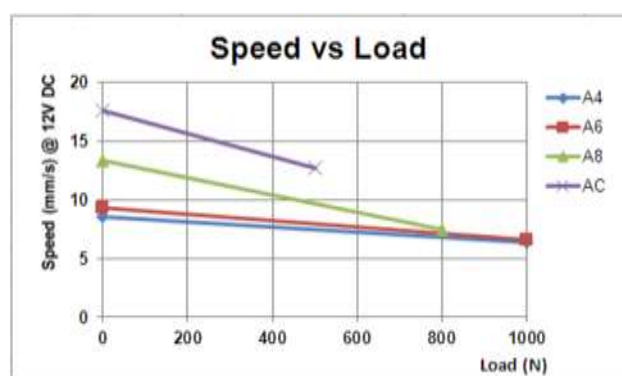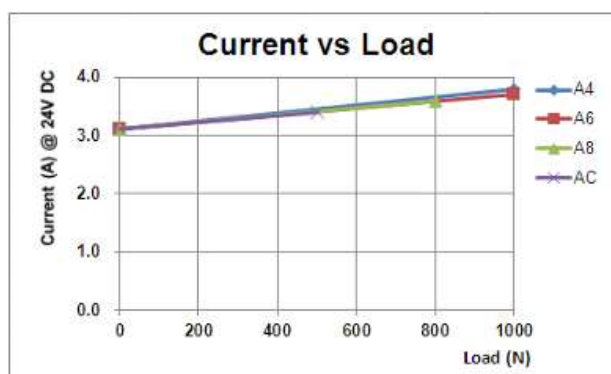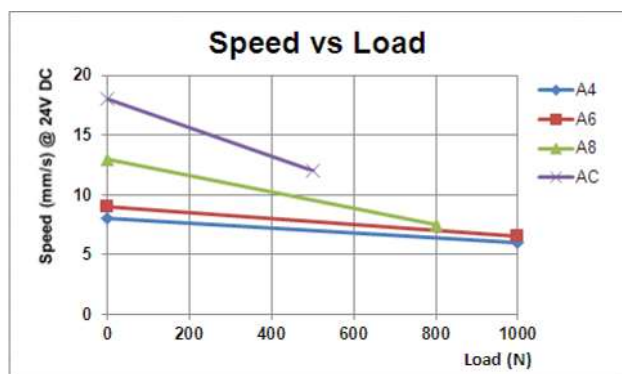

Model No.	Push Max. (N)	Pull Max. (N)	Speed (mm/s)		Current (A)			
			No load	Full load	No load		Full load	
					12V	24V	12V	24V
LD10-XX-A4-16-XXX.XXX-CXX	1000	1000	8	6	4.2	3.1	5.4	3.8
LD10-XX-A6-16-XXX.XXX-CXX	1000	1000	9	6.5	4.3	3.1	5.3	3.7
LD10-XX-A8-16-XXX.XXX-CXX	800	800	13	7.5	4.2	3.1	5.2	3.6
LD10-XX-AC-16-XXX.XXX-CXX	500	500	18	12	4.3	3.1	4.9	3.4



Plastic



Round hole



Universal joint



Aluminum+ bushing



Round hole+ bushing

◆



Plastic

- ◆

- ◆

Ordering Key

LD10———16—.—C

Type

Input Voltage
12 : 12V DC
24 : 24V DC

Motor and Spindle Type
A4 (Refer to Performance Data)
A6
A8
AC

Gear Ratio

A : Retracted Length

B : Extended Length

Front Connector
1 : Plastic
3 : Round hole
9 : Universal joint
A : Aluminum+ bushing
B : Round hole+ bushing

Rear Connector
6 : Plastic

Terms of Use

The user is responsible for determining the suitability of MOTECK products for specific applications. Due to continuous development in order to improve its products, MOTECK products are subject to frequent modifications and changes without prior notice. MOTECK reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by MOTECK.

MO-IND-2-T-001-140513A