


Actuator

MD100

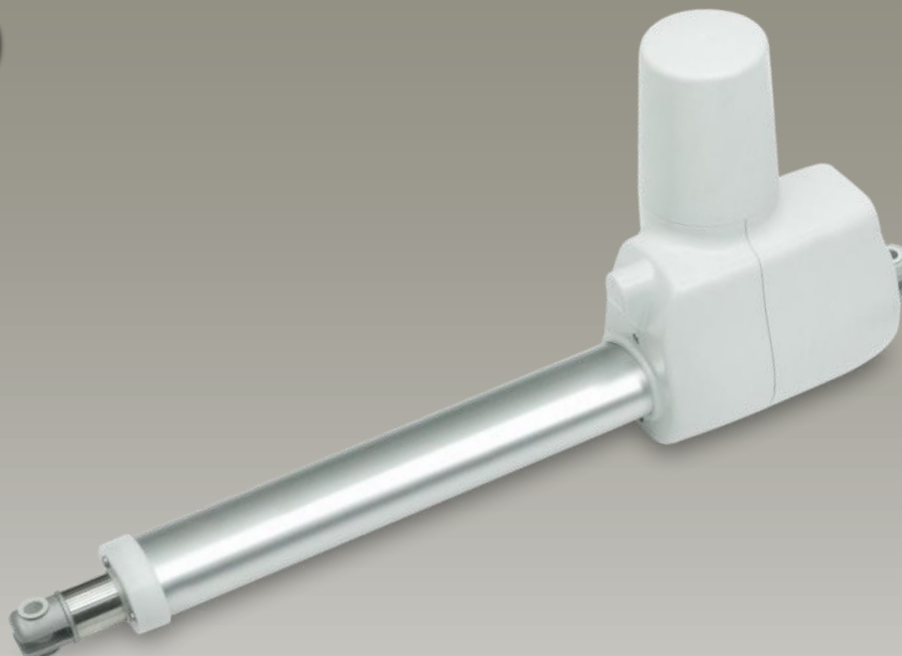


Features

- ◆ MD100 is quiet and powerful actuator designed for variety of medical and home care applications such as patient lift and medical bed.
- ◆ Main applications : medical and home care
- ◆ Input voltage : 24V DC
- ◆ Max. load : 10000N (push) / 6000N (pull)
- ◆ Max. current : 8.2 A @ 24V DC
- ◆ Max. speed : 9 mm/s @ no load
- ◆ Stroke : 100 ~ 600mm
- ◆ Duty cycle : 10% or 2 min. continuous operation in 20 min.
- ◆ IP protection level : IPX4
- ◆ Color : Light Gray(RAL 7035)
- ◆ Certified : EN60601-1-2, EN-61000-4-2, EN 61000-4-3, EN 60000-4-8, CISPR11:2003, UL ANSI/AAMI 60601-1
- ◆ Noise level : ≤ 52 dB
- ◆ Preset limit switches
- ◆ Stainless extension tube
- ◆ Aluminum outer tube
- ◆ Working environment temperature : +5 ~ 40 C

Options

- ◆ Push only
- ◆ Safety nut (in push direction)
- ◆ IPX6
- ◆ QR2 quick release
- ◆ MR2 manual release

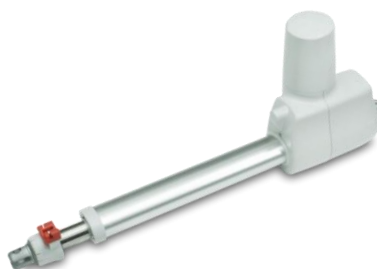

With QR2 Quick Release



With MR2 Manual Release

Compatibility

- 1. Control box**
CBP2, CB4P
- 2. Handset**
HC, HD, HF, HT
- 3. Accessory**
None

Performance Data

Model No.	Push Max. (N)	Pull Max. (N)	Speed (mm/s)		Current (A)	
			No load	Full load**	No load	Full load**
MD100-24DC-xxx.xxx-xxxxxxx	10,000*	6,000	7.0	5.2	1.0	7.0
MD100-24FC-xxx.xxx-xxxxxxx	10,000*	6,000	9.0	6.7	1.0	8.2



Note * : Within the stroke range of 150 mm.

Note ** : At 10,000N loaded.

Table of max. push load


Unit : KN

Spec of stroke (mm)	At actual stroke position (mm)					
	150	200	300	400	500	600
200	10	8	-	-	-	-
300	10	10	5	-	-	-
600	10	10	10	9	6	5

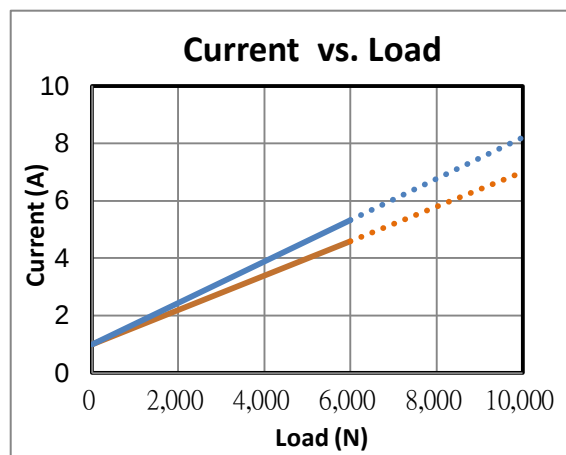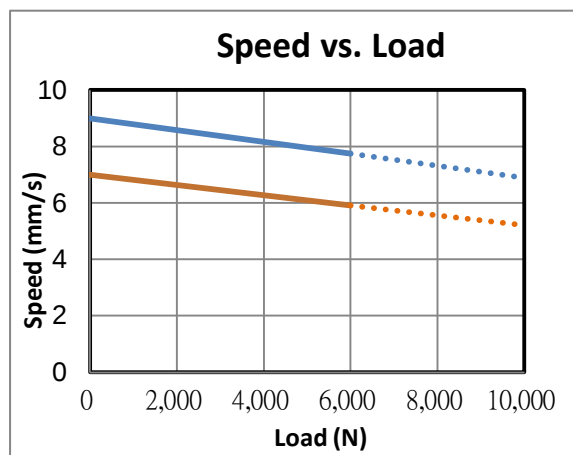

— DC : Standard Motor — FC : Fast Motor — Push/Pull
--- --- --- Push

Dimensions

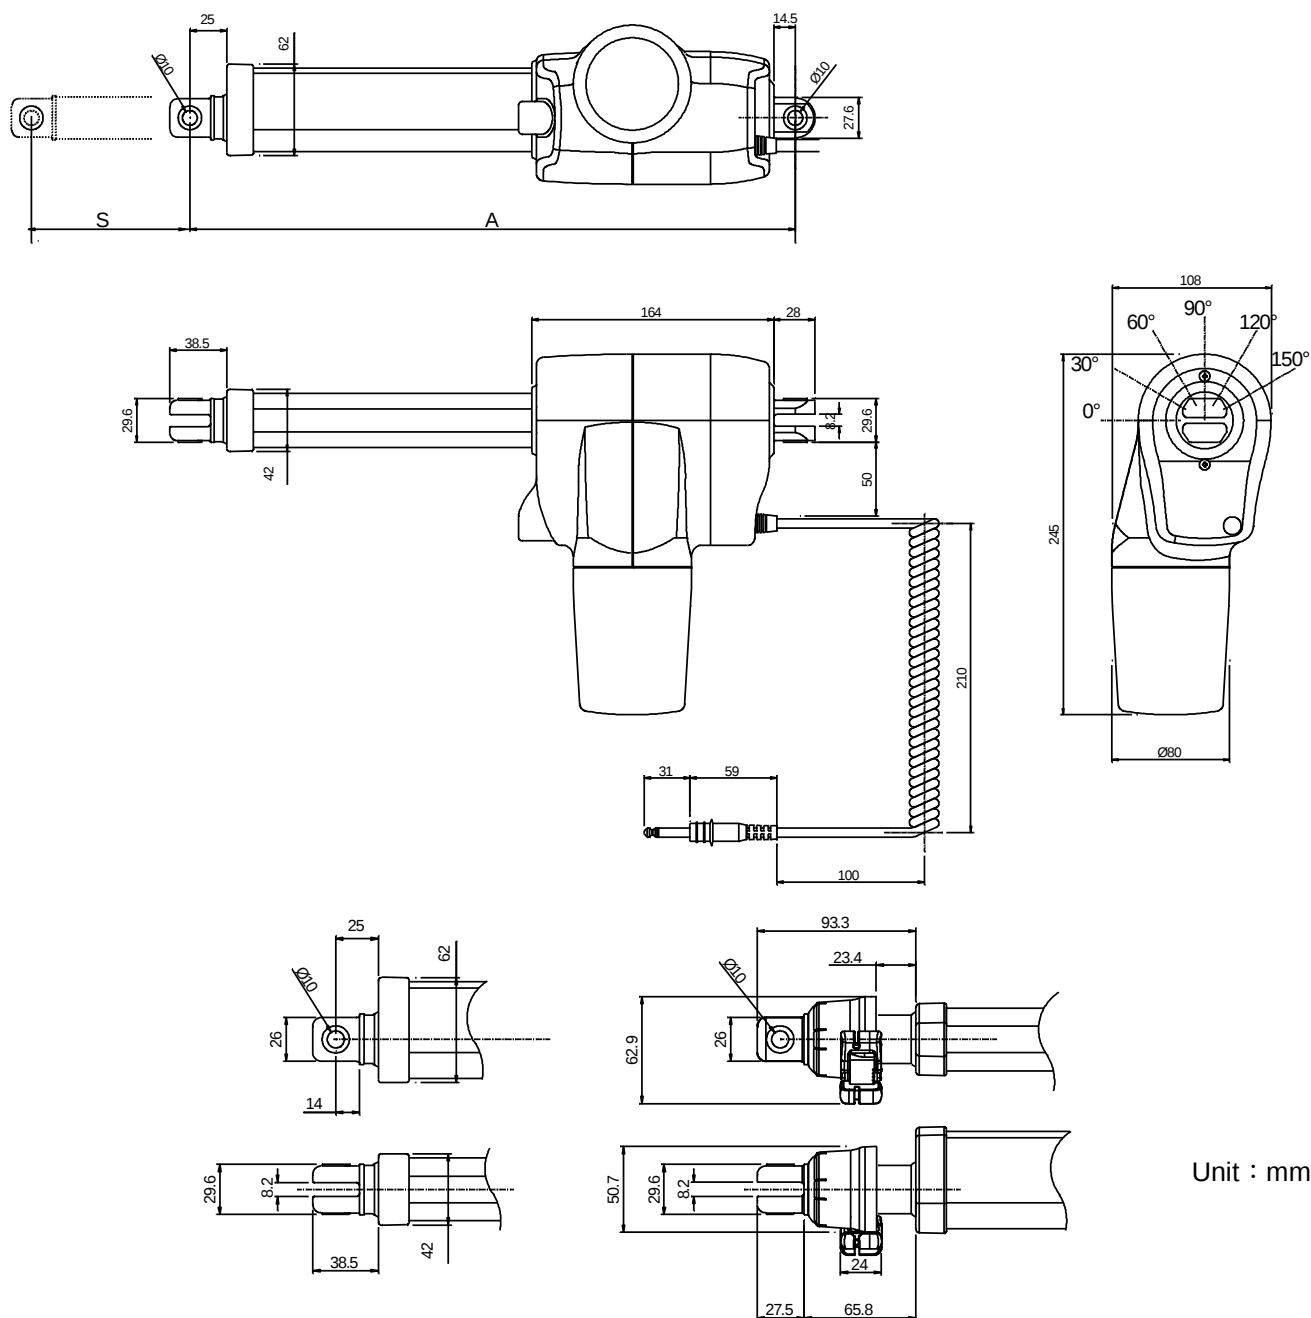

Unit : mm

Item		Spec
Stroke (S)		100~600 mm (available)
Installation (A)	Standard	$A \geq S+210$ mm
	Option (QR2/MR2)	$A \geq S+267$ mm

Ordering Key

MD100— — . — **0**

Input Voltage

24 : 24V DC

Motor

DC : Standard Motor
FC : Fast Motor

Retracted Length (mm)

Extended Length (mm)

Front Connector

1 : Zinc alloy with nylon bushing, φ10 mm

Rear Connector

(Zinc alloy with nylon bushing, φ10 mm, with following angle options)
1 : 0° **3 :** 30° **6 :** 60° **9 :** 90° **C :** 120° **F :** 150°

Safety Options

S : Safety Nut
P : Push Only + Safety Nut
M : MR2 Manual Release + Push Only + Safety Nut
Q : QR2 Quick Release + Push Only + Safety Nut
0 : None

Reserved

Color

G : RAL 7035

IP level

4 : IPX4 **6 :** IPX6

Cable & Pug

6.35mm jack plug (Φ13.8) 1 : Straight cable 300mm 2 : Straight cable 1000mm 3 : Coiled cable 400mm	6.35mm jack plug (Φ16.7) A : Straight cable 300mm B : Straight cable 1000mm C : Coiled cable 400mm
---	---

Terms of Use

The user is responsible for determining the suitability of MOTECK products for specific applications. Due to continuous development in order to improve its products, MOTECK products are subject to frequent modifications and changes without prior notice. MOTECK reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by MOTECK.