

Handset TXT



Features

- ◆ TXT is a RF remote handset designed for homecare and furniture applications. Paired with TXA receiver and you can enjoy the cable-free environment. The keypad backlight and LED torch function make it easier to use in darkness.
- ◆ Main applications : Homecare, furniture
- ◆ Frequency : 2.4GHz
- ◆ Operating distance : approx. 8m
- ◆ Support position memory function
- ◆ Max. number of motors this handset can drive : 2
- ◆ Available number of buttons : 3~10
- ◆ Button material : Silicone rubber
- ◆ Color : Pantone® 425C
- ◆ Backlight : Green
- ◆ LED torch : Amber
- ◆ Housing appearance : Textured black
- ◆ Battery : LR03x2 (AAA size)
- ◆ Unique RF ID Code
- ◆ Certified : EN60950-1, EN55022, EN61000-4, EN300400-2, EN301489-1, EN301489-3
- ◆ Handset holder with hook for easy placement


Options

- ◆ Positions memory function
- ◆ Joint movement for 2 motors
- ◆ Larger gap hook (nominal 50mm)
- ◆ Holder without hook
- ◆ Matt black painting

Compatibility

Model	RF Receiver
TXT-XX-X-00-XXX-XX TXT-XX-X-01-XXX-XX (Without memory function)	TXA4, TXA6
TXT-XX-X-03-XXX-XX TXT-XX-X-04-XXX-XX (Support memory function)	TXA5, TXA7

Dimensions

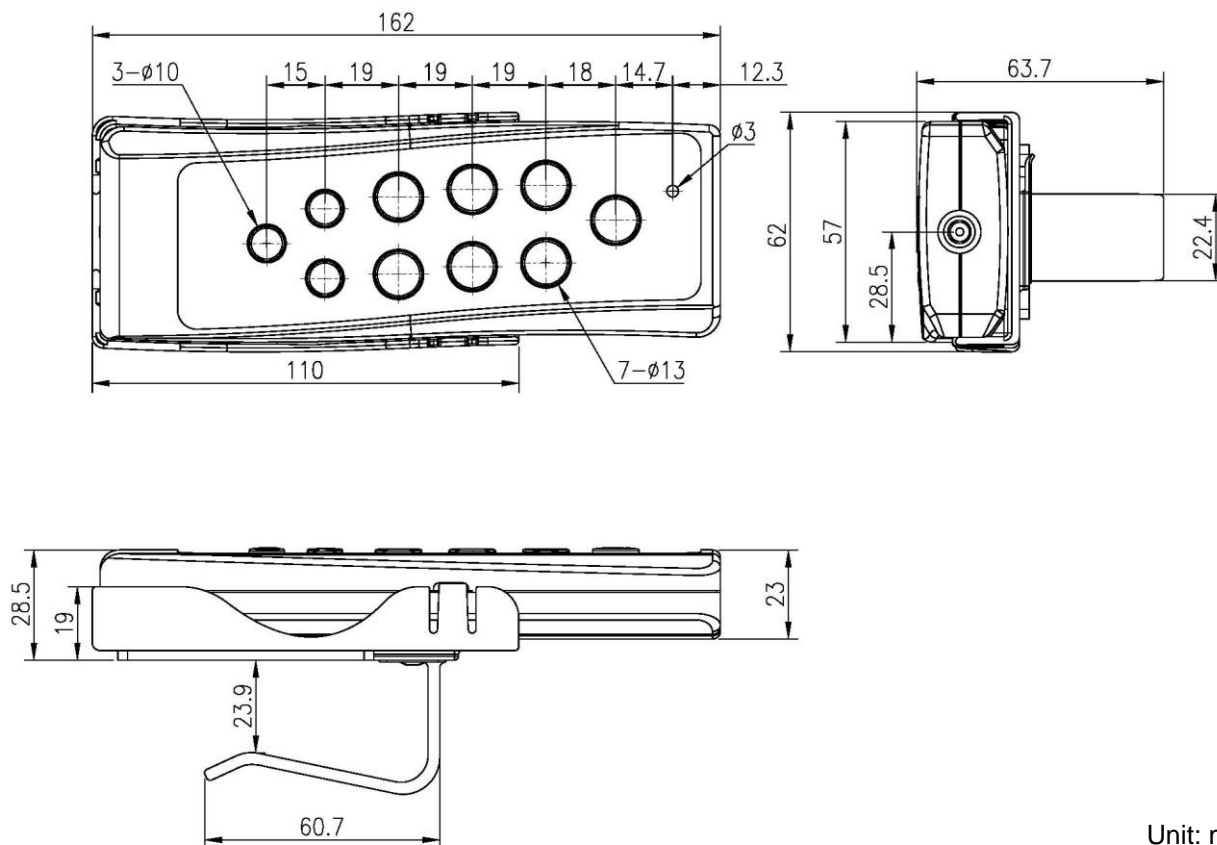

Unit: mm

Ordering Key

TXT — — — — —

Buttons

- 03 : 3 buttons
- 05 : 5 buttons
- 06 : 6 buttons
- 07 : 7 buttons
- 08 : 8 buttons
- 10 : 10 buttons

Number of Motors

- 1 : 1 motor
- 2 : 2 motors

Functions

- 00 : Standard
- 01 : Joint movement
- 03 : Position memory
- 04 : Joint movement and position memory

Accessories

- H3H : Holder with hook (30mm gap) (standard)
- H5H : Holder with hook (50mm gap)
- H0H : Holder without hook


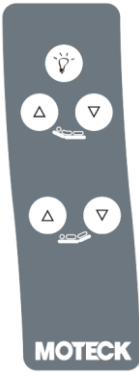
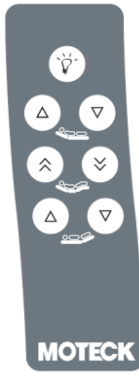

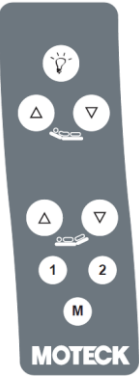
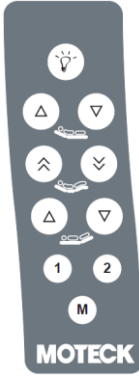
Color

- 0 : Standard—black textured
- 1 : Matt black paint

Panel artwork code

- A~F : Refer to paragraph of Standard Panel Artwork
- Z : Customized

Standard Panel Artwork

Code	A	B	C	
Motors	1 drive (Standard)	2 drives (Standard)	2 drives (Joint movement)	
Button Definition	LED Torch		LED Torch	
	1+	1-	1+	1-
			2+	2-
			2+	2-
Artwork				
Code	D	E	F	
Motors	1 drive (Position memory)	2 drives (Position memory)	2 drives (Joint movement + Position memory)	
Button Definition	LED Torch		LED Torch	
	1+	1-	1+	1-
			2+	2-
	Memory 1	Memory 2	Memory 1	Memory 2
	Memory Set		Memory Set	
Artwork				

***Button Definition:**

'1,2' represent number of actuator controlled.

'+' represents actuator extends,

'-' represents actuator retracts.

Terms of Use

The user is responsible for determining the suitability of MOTECK products for specific applications. Due to continuous development in order to improve its products, MOTECK products are subject to frequent modifications and changes without prior notice. MOTECK reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by MOTECK.