

Switching Mode Power Supply

TSW3



Features

- ◆ TSW3 is a grounding type and single output of switching mode power supply with a pleasant noise level and low standby power consumption. The input connector is 3-pin (with ground wire).
- ◆ Main applications : furniture
- ◆ Input voltage : 100V AC~240V AC 60/50Hz
- ◆ Output voltage : 29V DC \pm 5%
- ◆ Max. current : 3.0A @ 29V DC
- ◆ Output over current protection : 7.0~9.0A (230V AC)
- ◆ Input over current protection
- ◆ Output over voltage protection
- ◆ Output short circuit protection
- ◆ Duty cycle : 10% or 2 min continuous operation in 20 min.
- ◆ Protection class : Class I
- ◆ Standby Mode Power Consumption : 0.3~0.4W
- ◆ Cable type : power cord type
- ◆ Cable length : 3000mm
- ◆ Color : Black

Options


- ◆ Fixing plates

Compatibility

Control box:

Double motor (TW41 / TW61), CS1, CS2

Dimension

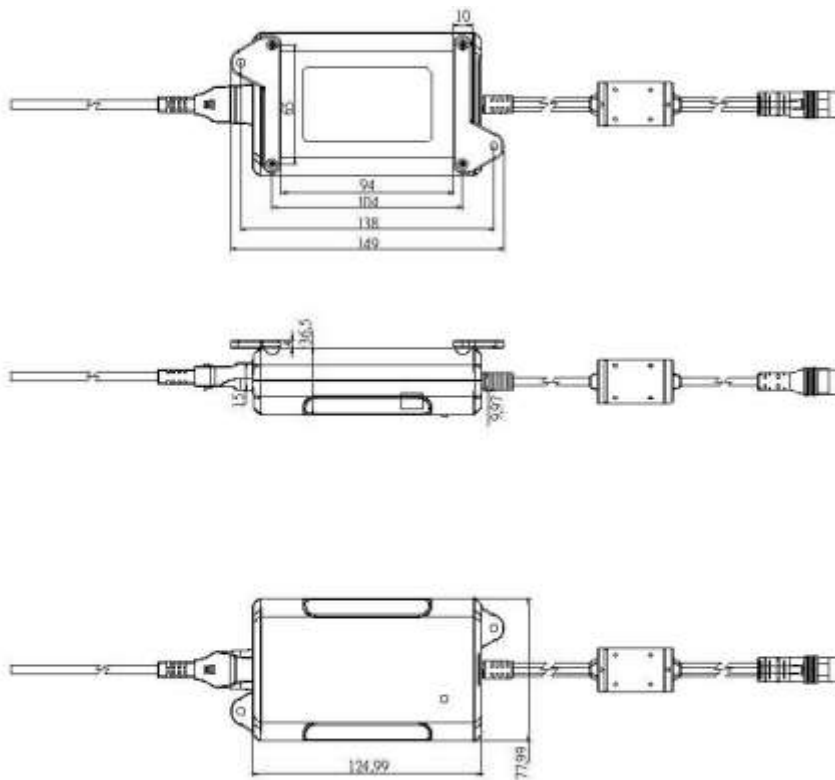

Unit: mm

Ordering Key

TSW3 — 2930 — ☐ — ☐ — ☐

AC Power Cord Length

3 : 3000mm (Standard)

2 : 2000mm

1 : 1000mm

X : Customized

AC Plug Type

B : United States

E : Europe

G : United Kingdom

I : Australia

Option

0 : None

F : Fixing plates

Terms of Use

The user is responsible for determining the suitability of MOTECK products for specific applications. Due to continuous development in order to improve its products, MOTECK products are subject to frequent modifications and changes without prior notice. MOTECK reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by MOTECK.

MO-FAM-4-T-001-141008A