

Switching Mode Power Supply TSW4



Features

- ◆ TSW4 is a wall plug type switching mode power supply. It ensures pleasant noise level and has low standby power consumption.
- ◆ Main applications: furniture
- ♦ Input voltage: 100V AC~240V AC 60/50Hz
- ◆ Output voltage : 29V DC ± 5%
- ◆ Max. current : 1.0A @ 29V DC
- ◆ Output over current protection: 4.0~5.0A (230V AC)
- ◆ Input over current protection
- Output over voltage protection
- Output short circuit protection
- ◆ Duty cycle: 10% or 2 min continuous operation in 20 min.
- Protection class: Class II
- ◆ Standby Power Consumption: 0.3~0.4W
- Cable length: 2800mm
- ◆ DC connector type : DIN 41529 female
- Color: greyish white
- Certified: ANSI/UL 1310, CAN/CSA-C22.2 No.223, EN60335-1, EN60335-2-29, EN62233, EN55014-1, EN55014-2, EN61000-3-2, EN61000-3-3



Compatibility

1. Actuator

FD60-DL


(DIN 41529 male plug with a flat pin and a circular pin)


2. Accessory


T Connector

(DIN 41529 male plug with a flat pin and a circular pin)

Dimension

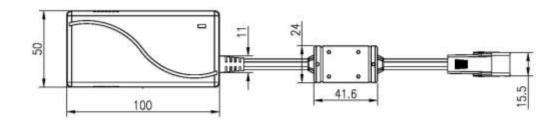

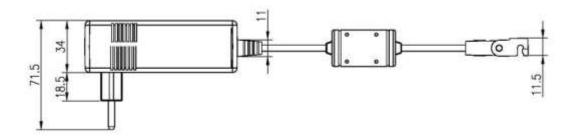

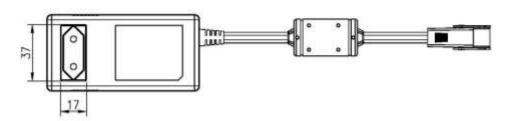

Unit: mm

Ordering Key

	TSW4	- 2	2910	_	_ [
DC Cable Length					
3: 2800mm (Stand	lard)				
2 : 1800mm					
1 :800mm					
X: Customized					
AC Plug Type					

A: IEC word plug type A (US plug) **C**: IEC word plug type C (EU plug)

Terms of Use