

# Foot Switch

## FS2



## Features

- ◆ FS2 is designed for control of medical applications such as physiotherapeutic beds, hospital beds, dental chairs, gynecologist chairs... etc., where hands are too busy to operate the application. There are 3 different versions, single, double and triple, which can work well with Moteck standard control box for 1 to 3 actuators.
- ◆ Main applications : homecare, medical
- ◆ Max. number of motors this handset can drive : 1~3
- ◆ Available number of buttons : 2~6
- ◆ IP protection level : IP54
- ◆ Color : Light Gray (RAL 7035)
- ◆ LED indicator
- ◆ Cable type and length : total 1500mm long with 500mm spiral cable

# Option

◆ IP66




## Compatibility

### 1. Control box

Moteck P1 Communication Type :


T Control, CS1, CBT2, CB2P, CB3T, MD6C, CB4M, CB4P

### 2. Available housing type of plug


	F type	V type	H type
			
T Control	✓		
CS1	✓		
CBT2	✓		
CB2P		✓	✓
CB3T	✓		
MD6C		✓	✓
CB4M	✓		
CB4P		✓	✓

# Dimensions


FS2-1-66  
Drive1 Actuator

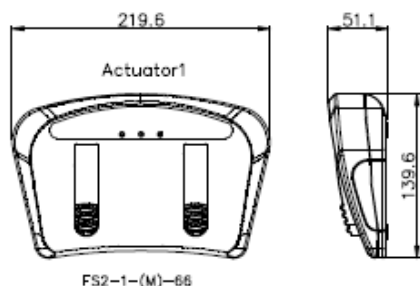

FS2-3-66  
Drive3 Actuator

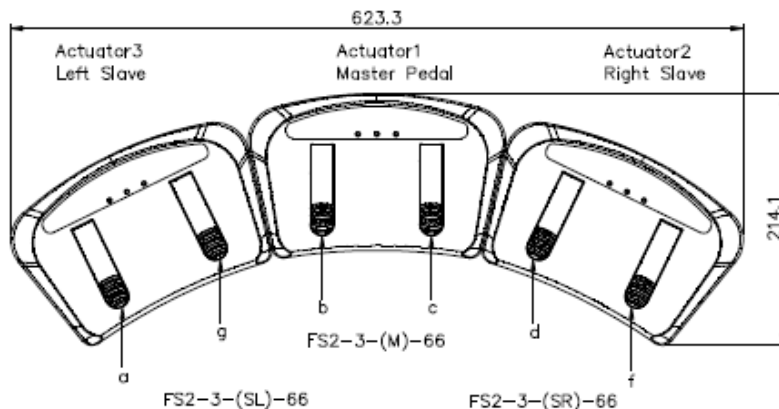

FS2-2-66  
Drive2 Actuator

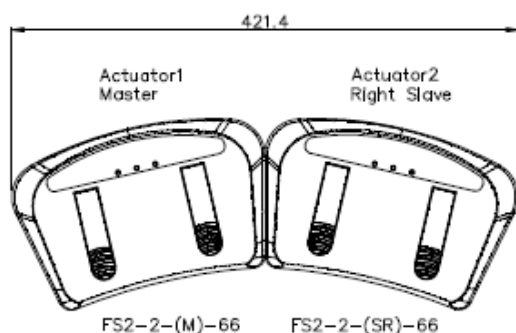

Unit: mm

## Ordering Key

FS2-□-□□

### Number of Motors

- 1 : 1 actuator (with 1 master pedal)
- 2 : 2 actuators (with 1 master and 1 right slave pedal)
- 3 : 3 actuators (with 1 master, 1 right slave and 1 left slave pedal)

### IP Protection Level

- 54 : IP54
- 66 : IP66

### Terms of Use

The user is responsible for determining the suitability of MOTECK products for specific applications. Due to continuous development in order to improve its products, MOTECK products are subject to frequent modifications and changes without prior notice. MOTECK reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by MOTECK.

MO-FAM-1-T-041-1.0