

Handset H2N



Features

- ◆ H2N is designed for homecare and furniture applications. With LED torch function, it is easy to use in the dark.
- ◆ Main applications : Homecare, furniture
- ◆ Max. number of motors this handset can drive : 3
- ◆ Available number of buttons : 2~9
- ◆ Button material : Silicone rubber
- ◆ Panel color : Black
- ◆ LED torch : White
- ◆ Cable type and length : total 880mm long with 420mm spiral cable
- ◆ With hook

Options

- ◆ Joint movement for 2 motors
- ◆ Large gap hook (nominal 50mm)
- ◆ Holder without hook
- ◆ LED torch

Compatibility



1. Control box

Motek P1 Communication Type : T Control, CBT2, CB3T, CB4M, CS1

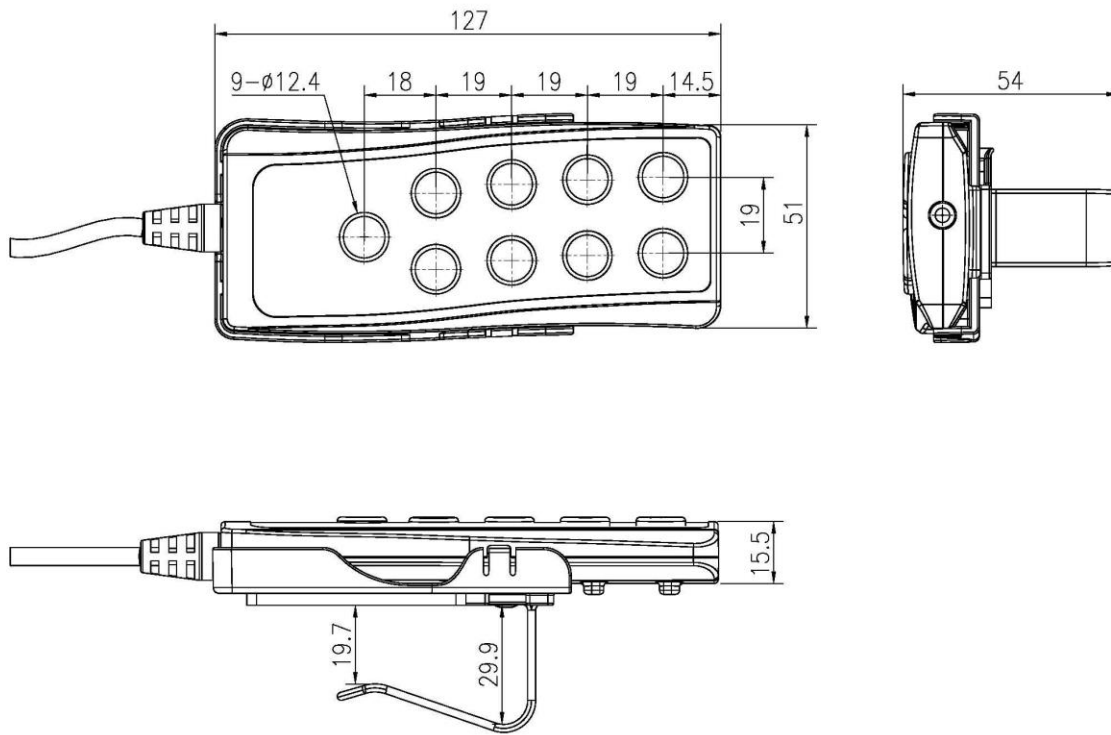
2. Double motors

Motek P1 Communication Type : TW40/60, TW41/61, TW42, TW43

3. Available housing type of plug:

	F type	A type
		
T Control	✓	
CBT2	✓	
CB3T	✓	
CB4M	✓	
CS1	✓	
TW40/60, TW41/61, TW42, TW43		✓

Dimensions



Unit: mm

Ordering Key



Buttons

02 : 2 buttons

04 : 4 buttons

06 : 6 buttons

07 : 7 buttons

09 : 9 buttons

Number of Motors

1 : 1 motor

2 : 2 motors

3 : 3 motors

Functions

00 : Standard

01 : Joint movement

Accessories

H3H : Holder with hook (30mm gap) (standard)

H5H : Holder with hook (50mm gap)

H0H : Holder without hook

H30 : Only hook (30mm gap)

H50 : Only hook (50mm gap)

Color

0 : Standard—Black

1 : Customized

Panel artwork code

A-F : Refer to paragraph of Standard Panel Artwork

Z : Customized

Cable

0 : Spiral (880mm)

Z : Customized



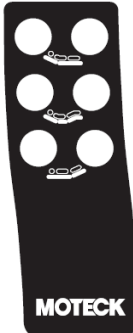
Connector

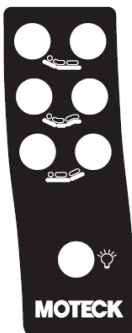
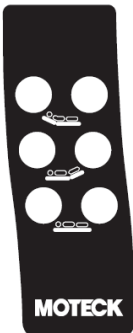

F : F type housing with 90° DIN plug

A : A type housing with 90° DIN plug

H : H type housing with 180° waterproof DIN plug

Standard Panel Artwork

Code	A		B		C	
Motors	1 drive (Standard)		2 drives (Standard)		2 drives (Joint movement)	
Button Definition			1+	1-	1+	1-
	1+	1-	2+	2-	1+2+	1-2-
					2+	2-
Communication Type	P1					
Artwork						

Code	D		E		F	
Motors	2 drives (Joint movement)		3 drives (Standard)		3 drives (Joint movement)	
Button Definition	1+	1-			1+	1-
	1+2+	1-2-	1+	1-	1+2+	1-2-
	2+	2-	2+	2-	2+	2-
			3+	3-	3+	3-
	LED Torch				LED Torch	
Communication Type	P1					
Artwork						

***Button Definition:**

'1,2,3' represent number of actuator controlled.

'+' represents actuator extends.

'-' represents actuator retracts.

Terms of Use

The user is responsible for determining the suitability of MOTECK products for specific applications. Due to continuous development in order to improve its products, MOTECK products are subject to frequent modifications and changes without prior notice. MOTECK reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by MOTECK.