

# Gate Opener System SW32 Swing Gate Series – Arm Type




## Features

- ◆ SW32 are powerful and quiet motors designed to be used in larger-sized swing gates, which allow you to activate the gate with a remote control. It's well-designed as a complete kit for consumers to install easily by themselves.
- ◆ Max. leaf length : 2.75m
- ◆ Max. leaf weight : 275kg
- ◆ Input : 110 / 230V AC
- ◆ Leaf opening time at 90° : 16 seconds
- ◆ IP protection level : IP44
- ◆ Duty cycle : 20%
- ◆ Operating temperature : -20°C ~ +60°C
- ◆ Excellent reliability and easy installation
- ◆ User-friendly interface with 2-digit display
- ◆ Emergency stop function
- ◆ Pedestrian mode (single leaf opening)
- ◆ Dry contact for video door phone or external key switch
- ◆ Error code display
- ◆ Rolling code inspection for more secured access control
- ◆ Up to 20 remote control keys can be memorized
- ◆ Support charging function with a backup battery (12V/5Ah lead-acid battery is optional)

# Motor

| SW32 |

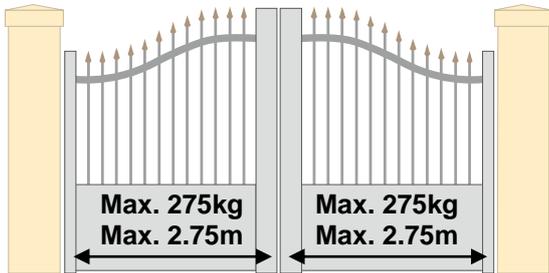

- ◆ Option : Aluminum die-casting arms

# Control Box

| CAK1 |

- ◆ Input : 110 / 230V AC ; 60 / 50Hz
- ◆ Output : 12V DC / 80W Max.
- ◆ IP protection level : IP44
- ◆ Color : Pantone warm gray 2U
- ◆ 8 cable grommets at the bottom
- ◆ Dimensions : 211(L) x 83(W) x 315(H) mm
- ◆ Weight : 2.6kg



# Remote Control

| XM4H |



| XA4H |



- ◆ Frequency : 433.92MHz with Rolling code
- ◆ 4 buttons, up to 10 channels
- ◆ Battery : 12V/A27 (XM4H) , 12V/A23 (XA4H)

---

## Warning Light

| WLT1 |



| WLT5 |



- ◆ Input : 12V DC / 10W
- ◆ Provide flashing signals during gate movement and obstacle detection.

## Photocells

| IPH1 |

- ◆ Current consumption
  - I. TX : 30mA
  - II. RX : 25mA



# Ordering Key

SW32-CAK1-□□□□-□□□□-IPH1

**Motor**  
SW32

**Control box**  
CAK1

**Remote control**  
XM4H (default)  
XA4H

**Warning light**  
WLT1 (default)  
WLT5

**Photocells**  
IPH1

## Terms of Use

The user is responsible for determining the suitability of MOTECK products for specific applications. Due to continuous development in order to improve its products, MOTECK products are subject to frequent modifications and changes without prior notice. MOTECK reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by MOTECK.